




Siga Elementos de Fixação

Pág. 1

Nº SG-PF-012

R e v. 00

Parafusos Tipos : Estojo / Prisioneiro / Tirante / Barra Roscada = Rosca Total Norma ANSI B16.5-1988 ANSI B1.1

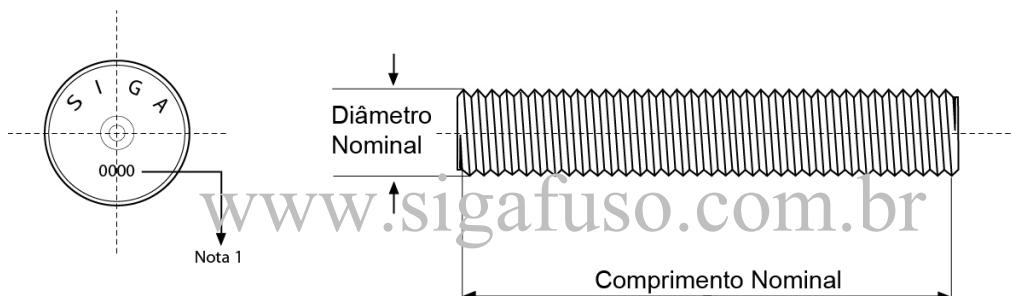

Diâmetro Nominal Classe 2 A	Fios	Rosca	Diâmetro Externo		Diâmetro Primitivo	
			Máx.	Mín.	Máx.	Mín.
1/4"	20	UNC	6,322	6,117	5,496	5,403
5/16"	18	UNC	7,907	7,687	6,99	6,889
3/8"	16	UNC	9,491	9,254	8,46	8,349
7/16"	14	UNC	11,076	10,816	9,898	9,779
1/2"	13	UNC	12,661	12,386	11,392	11,265
9/16"	12	UNC	14,246	13,958	12,873	12,741
5/8"	11	UNC	15,834	15,528	14,335	14,197
3/4"	10	UNC	19,004	18,677	17,353	17,204
7/8"	9	UNC	22,176	21,824	20,342	20,183
1"	8	UNC	25,349	24,969	23,286	23,114
1.1/8"	8	UN	28,521	28,141	26,459	26,284
1.1/4"	8	UN	31,696	31,316	29,634	29,457
1.3/8"	8	UN	34,869	34,489	32,806	32,624
1.1/2"	8	UN	38,044	37,664	35,981	35,797
1.5/8"	8	UN	41,219	40,839	39,156	38,969
1.3/4"	8	UN	44,391	44,011	42,329	42,139
1.7/8"	8	UN	47,566	47,186	45,504	45,309
2"	8	UN	50,741	50,361	48,679	48,481
2.1/4"	8	UN	57,089	56,709	55,026	54,824
2.1/2"	8	UN	63,439	63,059	61,376	61,169
2.3/4"	8	UN	69,786	69,406	67,724	67,514
3"	8	UN	76,133	75,753	74,071	73,856

Nota

1 – Todas as medidas em milímetros (mm)